



Koehler
THERMAL PAPER

KT 55 FA


Application: POS receipts, ATM, fax paper

- Description:**
- standard sensitivity
 - 10 years durability at correct storage for thermal paper
 - improved stability against environmental influences
 - produced without using bisphenol A (BPA) *

* may contain traces of bisphenol A (BPA content < 10 mg/kg)

Physical Properties	Value	Test Method
Substance	52 g/m ² ± 4 g/m ²	ISO 536
17 x 22 - 500 sheets	13.8 ± 1.1 #	
Caliper	60 ± 5 µm 2.36 ± 0.20 mils	ISO 534
Smoothness (Bekk, front)	≥ 350 s	ISO 5627
Brightness (front)	≥ 80 %	ISO 2470
Tensile strength MD	≥ 40 N / 15 mm	ISO 1924-2
CD	≥ 15 N / 15 mm	ISO 1924-2
Preservation Properties	Optical density after ageing **	Conditions
Heat resistance	≥ 90 %	24h / 50°C
Moisture resistance	≥ 80 %	24h / 40°C 80% RH
Light resistance	≥ 75 %	24h / 16.000 lux

** based on maximum optical density

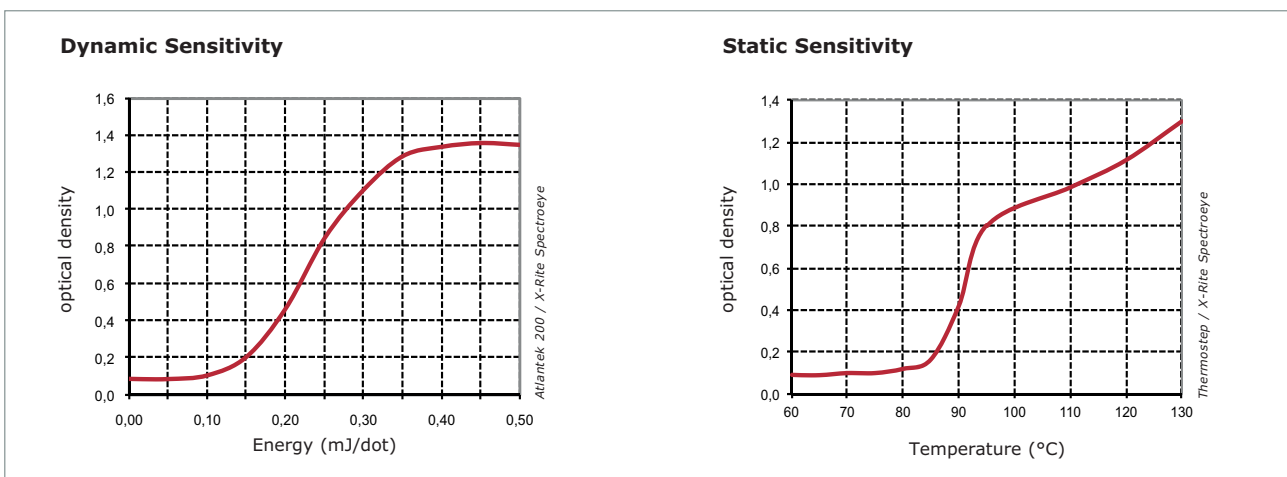

subject to change without notice



Papierfabrik August Koehler SE

Hauptstraße 2 · 77704 Oberkirch, Germany · Phone +49 7802 81-0 · Fax +49 7802 81-4330 · www.koehlerpaper.com