



Printec® 723/724


Key performance

- Ideal for folding carton applications
- High chemical resistant face compatible with most hybrid and UV inks
- Pliable carcass for easy handling and mounting especially on large format presses
- Enhanced compressible layer for increased longevity

MAIN APPLICATION

Commercial Sheetfed,
Folding carton

**Printec 723/724 is available in
3 & 4 ply, .067" +/- .001" -
.077" +/- .001" thickness**

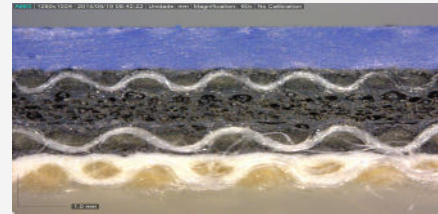

Printec 723/724



The product at a glance

INK COMPATIBILITY	Hybrid
PRINTING SURFACE COLOUR	Blue
THICKNESS (mm)	.067" +/- .001" 3 ply .077" +/- .001"
SURFACE ROUGHNESS (Ra micron)	1,0
ELONGATION (%)	<2%
TENSILE STRENGTHS (N/mm)	>58
WATER & SOLVENT PROTECTION	NO

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printingsm@trelleborg.com**