



GalerieArt Silk

Prepress datasheet

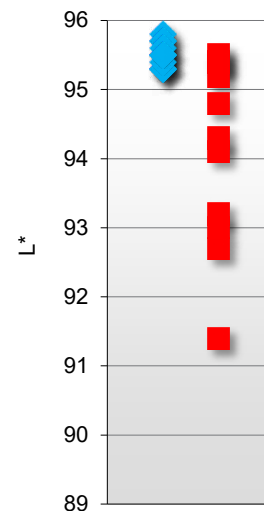

| Paper | Basis weight g/m ² | CIE Whiteness D65 ISO11475 | Fluorescence (Δ Brightness) ² ISO2470-2 | Roughness PPS ISO 8791-4 | Colour coordinates white backing ISO 13655 M1 ³ (D50/2°) | | | Colour coordinates black backing ISO 13655 M1 ³ (D50/2°) | | |
|-----------------|----------------------------------|----------------------------------|--|--------------------------------|---|-----|------|---|-----|------|
| | | | | | L* | a* | b* | L* | a* | b* |
| | | | | | GalerieArt Silk | 90 | 127 | 12 | <2 | 95,3 |
| GalerieArt Silk | 100 | 127 | 12 | <2 | 95,7 | 1,5 | -6,0 | 92,7 | 1,1 | -7,0 |
| GalerieArt Silk | 115 | 127 | 12 | <2 | 95,8 | 1,5 | -6,1 | 93,0 | 1,0 | -6,8 |
| GalerieArt Silk | 130/135 | 127 | 12 | <2 | 95,3 | 1,5 | -6,0 | 93,2 | 1,1 | -6,7 |
| GalerieArt Silk | 150 | 127 | 12 | <2 | 95,7 | 1,4 | -5,8 | 94,1 | 1,1 | -6,3 |
| GalerieArt Silk | 170 | 127 | 12 | <2 | 95,3 | 1,5 | -6,3 | 94,3 | 1,2 | -6,8 |
| GalerieArt Silk | 200 | 127 | 12 | <2 | 95,5 | 1,4 | -6,0 | 94,8 | 1,2 | -6,5 |
| GalerieArt Silk | 250 | 127 | 12 | <2 | 95,4 | 1,3 | -6,0 | 95,2 | 1,2 | -6,1 |
| GalerieArt Silk | 300 | 127 | 12 | <2 | 95,5 | 1,8 | -5,7 | 95,4 | 1,8 | -5,7 |
| GalerieArt Silk | 350 | 127 | 12 | <2 | 95,6 | 1,9 | -5,5 | 95,5 | 1,8 | -5,6 |
| GalerieArt Silk | 400 | 127 | 12 | <2 | 95,5 | 1,8 | -5,3 | 95,4 | 1,7 | -5,4 |

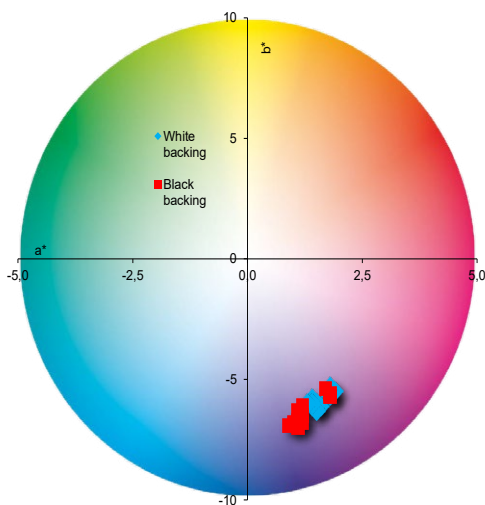

Recommendations:

| | |
|---|--|
| Print substrate / ISO 12647-2:2013: | PS 1 (Premium coated) |
| Printing condition / ISO12647-2:2013: | PC 1 |
| Screening and dot gain (TVI) ⁴ : | Conventional: Curve A in ISO 12647-2 (60–80 l/cm), Stochastic: Curve E in ISO 12647-2 (Spot size 25 µm) |
| Characterisation data ⁵ : | Fogra 51 |
| ICC-profile ⁵ : | All ICC-profiles based on above char data such as PS0coated_v3.icc |
| Max TAC% (Total Area Coverage): | 300 % |

Notes:

- 1) The values in the table are intended to help the printer to choose correct printing conditions for the paper in question. These values are not paper specifications and thus have no tolerances. For official paper specification please refer to technical specification datasheets for each individual paper grade
- 2) Δ Brightness is difference of Brightness (D65) and Brightness (UV cut). It is an estimate for OBA amount in paper. Levels: 0-4 faint, 4-8 low, 8-12 moderate, 12-> high
- 3) Equipment used: X-rite i1 Pro2. Older M0 values available on request
- 4) Dot gain level is influenced by paper roughness and rougher papers may need more compensation in platemaking to reach correct dot gain level
- 5) As an alternative char data / ICC -profile older Fogra 39 / ISOcoated v2_300.icc can also be used